

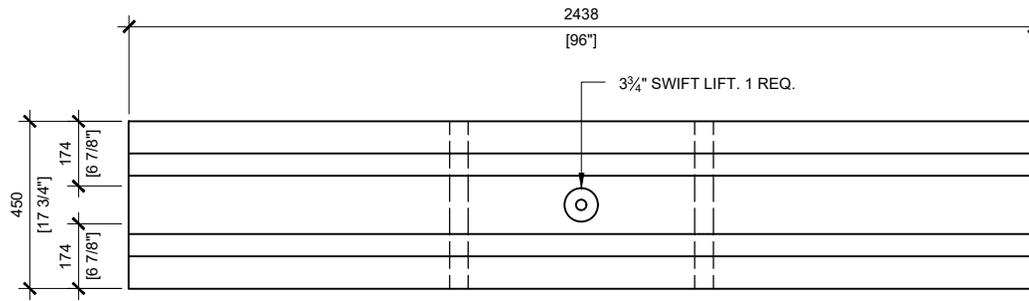



FRONT VIEW
SCALE 1/20

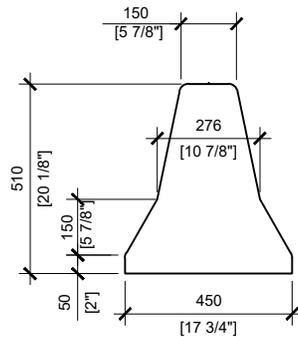

TOP VIEW
SCALE 1/20

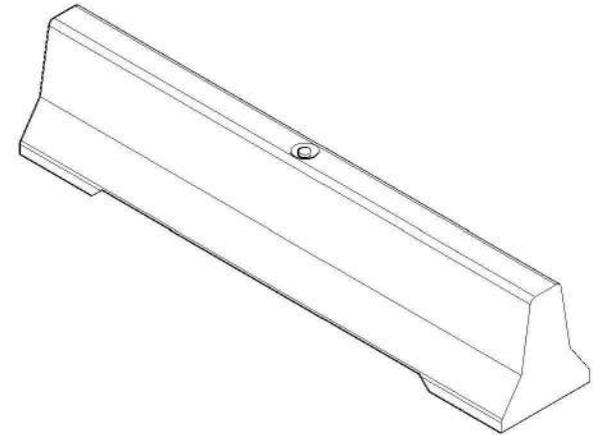

LEFT VIEW
SCALE 1/20

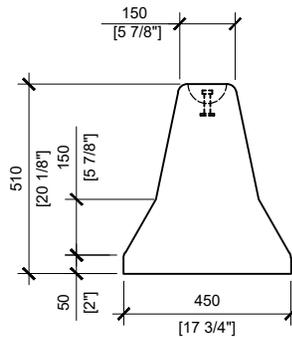

RIGHT VIEW
SCALE 1/20

GENERAL NOTES:

1. ALL UNITS MUST BE HANDLE WITH PROPER LIFTING EQUIPMENT.
2. REINFORCING SHALL BE GRADE 400W, DEFORMED STEEL BARS. CONCRETE COVER SHALL BE 50MM MINIMUM.
3. ALL CONCRETE EDGES SHALL HAVE 15X45° CHAMFER
4. WELDS SHALL BE ACCORDING TO CSA W59.
5. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SHOWN.



MANUFACTURED:
OTTAWA, ON
613-822-1488
www.powerprecast.com

CONCRETE TYPE: SCC
CONCRETE: 45MPa / 6,526PSI
AIR CONTENT: 6.5% ± 1.5%
REINFORCEMENT: STEEL TO CSA CAN
A23.4-05 / A23.3. G30.18 Fy=400MPa

WEIGHT: 1,537lbs / 715kg

SHEET:
1/1

DWG NO.
B - 1.06

DRAWN BY:
S.RIMLAND

DATE:
DEC/2019

Mini Median Barrier

PPS REFERENCE: 409213