




PLAN VIEW  
SCALE 1:16

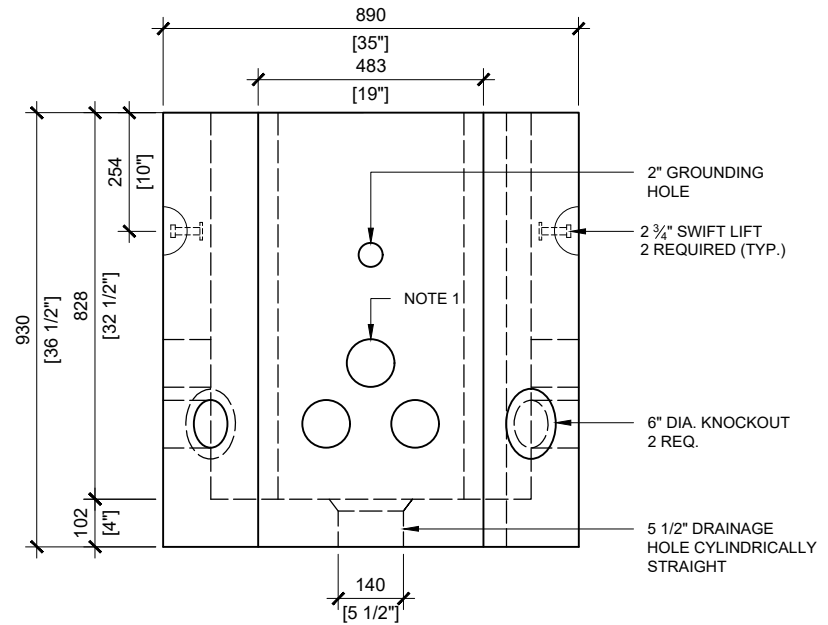

FRONT VIEW  
SCALE 1:16

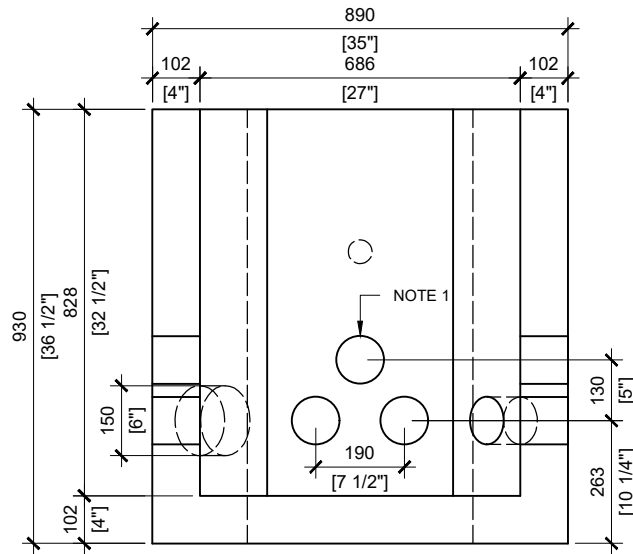

SECTION A  
SCALE 1:16

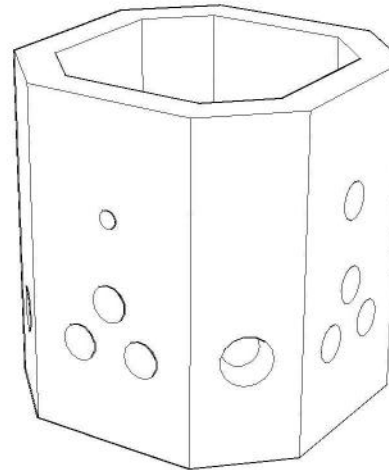

**GENERAL NOTES:**

1. CABLE ENTRY OPENINGS - 4-3/4" PVC SEALS .
2. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
3. EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
4. MIN OVERHEAD CLEARANCE OF 18FT IS REQUIRED
5. NO LIFTING UNTIL CONCRETE HAS REACHED A MIN STRENGTH OF 25 MPA DETERMINED BY COMPRESSIVE TESTING OF CYLINDERS CURED IN SIMILAR CONDITIONS.
6. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT (I.E. SPREADER BAR)
7. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE
8. DESIGNED FOR NO FILL COVER AND CL-625-ONT TRUCK WHEEL LOAD APPLIED ADJACENT TO UNIT BUT NOT ON TOP OF UNIT
9. AS PER CITY OF OTTAWA LID004D & T4



MANUFACTURED:  
OTTAWA, ON  
613-822-1488

www.powerprecast.com

CONCRETE TYPE: SCC  
AIR CONTENT: 6.5% ± 1.5%  
REINFORCEMENT : STEEL TO CSA  
CAN A23.4-05 / A23.3. G30.18  
Fy=400MPa

WEIGHT:  
1,558lbs / 708kg

SHEET:  
1/1

DWG NO.  
E - 2.05

DRAWN BY:  
E.ZHOU

DATE:  
DEC/2019

**J-6.39 TRAFFIC CONTROL MANHOLE  
(OCTAGONAL MAINTENANCE HOLE)**

REFERENCE DRAWING : CITY OF OTTAWA LID004D  
PPS REFERENCE: 409271